

4 Burner Straight Row 220V Unit

Model # 8140-257-001S

DESCRIPTION

INVISACOOK – 4 Burner Unit is a complete, self-contained system built in a straight row to fit in a 36 to 40 inch cabinet base.. It has 4 induction points to cook thru your Porcelain countertop, evenly and sufficiently. While it has a controller that can placed anywhere

FEATURES

- 4 separate burning unit elements
- Power Boost option for faster Water Boiling speed.
- Designed for Undermounting installation for any Porcelain countertop surface in any way possible



DEVICE OPERATION

When a compliant receiver such as an induction quality pan is placed on the induction coil, the unit will automatically adjust the charging power, based on the feedback command

from the controller. When searching for connection, LED number will blink red, once pan and unit are connected the LED number will stay illuminated. If the pan moves too far in relation to the induction coil, the LED will blink IC and a Beeping nice will follow, indicating an error in connection. If this (or any other error condition) occurs, try resetting the unit by unplugging it and waiting 10 seconds to reconnect, for an automatic reset.

APPLICATIONS

4 Burner unit can be used in these options and materials:

- Typical House Kitchen
- Multi-Family (Apartments)
- Boats / RVs / Airplanes
- Tiny Houses
- · Outdoor Kitchens
- Entertaining Islands or Tables
- Cooking Carts
- Materials— Porcelain

Status	Indicator
Off	No power/inactive
Power on	LEDlights on Red Dash
Connected	LED Number stays illuminated
Lost of Connection	LED Blinking IC Red
Noise Alert	Beeping Noise of no Connection
Error condition	A Letter Followed by a Number(H-8)

FOREIGNOBJECT DETECTION

INVISACOOK-4BurnerUnit-Unit contains an algorithm for sensing the presence of foreign objects placed on the unit. When a foreign object is placed on the transmitter coil during operation, the unit will shut down and the LED will flash red showing IC and make a beeping noise.

INVISACOOK - 4 BURNER STRAIGHT UNIT





ELECTRICAL ANDMECHANICAL SPECIFICATIONS

Dimension	Description
Dimension	925 x 320 x 50mm
Bottom Size	895 x 300 x 49.5mm
Recommended material	Max thickness is 12mm to 20mm Porcelain.
Recommended Breaker	50 AMP Breaker

Connection	Description
AC Input	220/240Vac 50/60HZ
Wattage	5,200 W (Total Shared) 23.6 AMPs
Power	2000w + 1600w + 1600w + 2000w
Platen Burner Size	210mm - 180mm - 180mm - 210mm

TEMPERATURE

Operating Cooking Temps	97°F min / 400 °F max. (36°C min / 205°C max.)
Non-operating Temps	-40°F to 158°F (-40°C to +70°C)

HUMIDITY

Operating:	To85% relative humidity (non-condensing)
Non-Operating:	To95% relative humidity (non-condensing)

ALTITUDE

Operating:	to 3,048 Meters
Non-operating:	to 15,240 Meters

INVISACOOK - 4 BURNER UNIT



WARRANTY

INVISACOOK - 4 Burner Straight Unit - Individual is covered by a two-year consumer warranty that provides product replacement only and a five-year limited warranty.

PRODUCT REGULATORY REQUIREMENTS

Intended Application – This product is intended for indoor or outdoor covered use, not for use in inclement weather.

PRODUCT SAFETY

IEC60950-1 (International)

PRODUCT EMCCOMPLIANCE - CLASS B COMPLIANCE

NOTE: The product is required to comply with Class B emission requirements as the end systemthat it is configured into is intended for a commercial environment and market place. System is to have minimum of 3db margin to Class B Limits.

UL 858:2014 Ed.16+ EN 55014-1:2017

EN 55014-2:2015+A1:2018

EN 61000-3-2:2019

EN 61000-3-3:2013+A1:2019

CSA C22.2#46:2013 Ed.9

EN 60335-1:2012+A11:2014+A13:2017+A1:2019

+A2:2019

+A14:2019


EN 60335-2-9:2019

EN 62233:2008

AU/NZ ISO/IEC 17025

G-MARK GLVD0016-0051

TUV (EU) No 66/2014 - 2009/125/EC

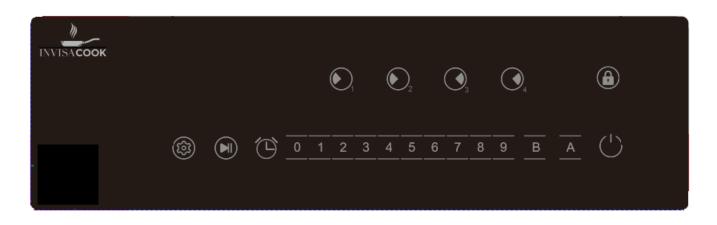

LegalNotices

Information contained in this publication regarding deviceapplications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. "Typical" parameters which may be provided in Energy data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for your application by your technical experts. INVISACOOKMAKESNOREPRESENTATIONSOR WARRANTIESOFANYKINDWHETHEREXPRESSORMPLIED WRITTENORORAL STATUTORY OR OTHER WISE RELATED TO THE INFORMATION UNDUBLISHED TO TISE ON DITION, QUALITY, PERFORMANCEMERCHANTABLITYORFITNESSFORPURPOSEShould the Buyerpurchase or use INVISACOOK products for any such unintended or unauthorized application, the Buyershall indemnify and hold INVISACOOK LLC, and its officers, employees, subsidaries, affiliates, and distributors harmless againstall claims, costs, damages, and expenses, and reasonableattomey fees arising out of, directly or indirectly, anyclaim of personal injury or deathassociatedwith such unintended or unauthorized use, evenif such claim alleges that INMSACOOKLL Cetal, was negligent regarding the design or manufacture of the unit in question or claim. No licenses are conveyed, implicitly or otherwise, under any INVISACOOK LL Cintellectual property rights.

INVISACOOK - 4 BURNER STRAIGHT ROW UNIT

